

3M-Matic™ Adjustable Case Sealer 7000a Pro/7000a3 Pro Consistent. Reliable. Tough.

SEALS UP TO 40 CASES PER MINUTE

Today, companies need to be fast and flexible in every phase of their operations—and that includes end-of-line packaging. The 3M-Matic™ Adjustable Case Sealer 7000a Pro/ 7000a3 Pro gives manufacturers and distributors from every industry the packaging flexibility and speed to stay one step ahead of the competition.

3M™ AccuGlide™ Taping Head Technology and tough, durable construction make sure your boxes are sealed swiftly and reliably, shift after shift, year after year. Plus, expanded box size capacity and interchangeable 2-inch or 3-inch taping heads allow you to change as your business changes, boosting your productivity, cutting your costs and keeping your business nimble.


Innovative Features

- 3M™ AccuGlide™ 3 Taping Heads ensure reliable application of tape without box damage
- Auxiliary offset taping head position increases flexibility in sealing shorter boxes
- Interchangeable 2-or 3-inch taping heads maximize production flexibility
- Easily accessible side handle and reference ruler make height adjustments a snap for a wide variety of case heights from 2.0–36.25 inches
- Rugged, dual-extruded columns allow for smooth incremental adjustments to case heights
- Unified side guides adjust both sides at once for one-handed simplicity

Standard Features

- Top and bottom drive belt system
- Top flap compression rollers
- Centrally located emergency stop
- Spring-loaded upper drive assembly
- Dual masts and dual lead screws

Options: Infeed and exit conveyors, locking casters, low tape indicator, tape application monitor, box hold-down attachment

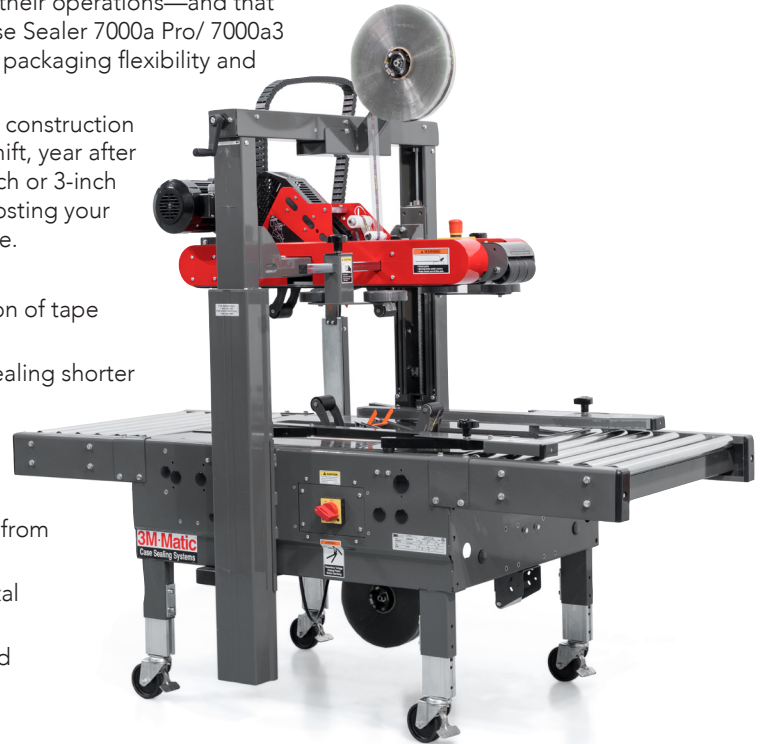

BOX CAPACITY INCHES (MM)

Machine	Length	Width	Height	Height Range w/masts raised
7000a Pro & 7000a3 Pro	Min: 6 (150) Max: Unlimited	Min: 6.5 (165) Max: 26.5 (673)	Min: 2 (50) Max: 28 (203)	Min: 12.75 (324) Max: 36.25 (921)

Contact your 3M Certified Specialist for special modifications that may be available for sizes not listed

Note: 3M-Matic™ Adjustable Case Sealer 7000a Pro/7000a3 Pro can accommodate most boxes within the size range listed here.


However, if the Box Length in Direction of Seal divided by Box Height is less than .75 in boxes should be test run to ensure proper machine performance.

SPECIFICATIONS

2" Scotch® Box
Sealing Tapes



3" Scotch® Box
Sealing Tapes

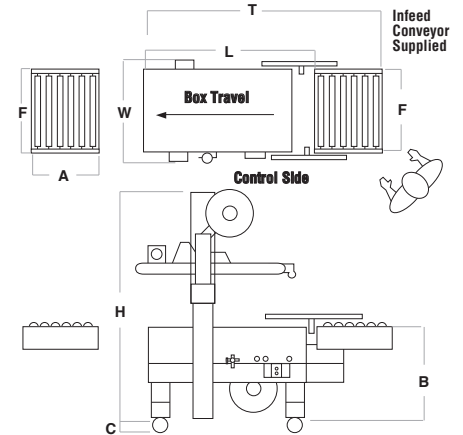

3M-Matic™ Case Sealer 7000a Pro 3M-Matic™ Case Sealer 7000a3 Pro 7000a Pro & 7000a3 Pro Footprint

MACHINE DIMENSIONS INCHES (MM)

Machine	Tape Size In. (mm)	Machine Weight* Lbs. (kg)	Width	Length	Height (with masts raised)	A*	B	C***	F	Electrical	Operating Rate	Drive Belt Speed
7000a Pro	1.5-2 (36-48)	350 (159)	37.25 (946)	40.25 (1022)	111 (2290)	18 (457)	Min: 21 (508) Max: 35 (889)	4.28 (111)	30.25 (768)	115V 60Hz 3.8A 440 watts 8' cord	Up to 40 per minute	100 fpm (.05 m/s)
7000a3 Pro	2-3 (48-72)	350 (159)										

Offset taping head position always requires the short tape leg.

*Requires a column adjustment for case heights lower than 4.25" or higher than 28".

**Minimum case height of 1.5" requires LHB taping heads in 1-3/8" tape leg position, 78 fpm belt speed.

***Maximum case height of 36.25" can be obtained by moving the columns and the upper assembly to the upper mast position. Minimum will be 12.75".

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

3M Premier Service
Industrial Products Distributor