

3M-Matic™ Stainless Steel Adjustable Case Sealer 700a-s Consistent productivity in corrosive environments

SEALS UP TO 30 RANDOM SIZED CASES PER MINUTE


For durability and productivity in high-moisture and corrosive packaging operations, the 3M-Matic™ Stainless Steel Adjustable Case Sealer 700a-s conforms to NEMA standard 250 type 4x specifications for water-tight enclosures.

Engineered with 99% stainless steel for corrosion resistance, there are no painted surfaces.

For productivity, a unique 4-belt upper and lower drive system conveys uniformly-sized RSCs for a sealing rate of up to 30/minute.

- Wide range of case sizes from as small as 4.75" high x 6" wide to as large as 24.5" high x 21.5" wide.
- Sturdy construction easily handles case weights up to 85 lbs.
- Compact footprint saves floor space.
- Easy-to-install and use, you'll be quickly making consistent seals on a wide range of RSCs with minimal operator training.

Options: infeed/exit conveyor, casters

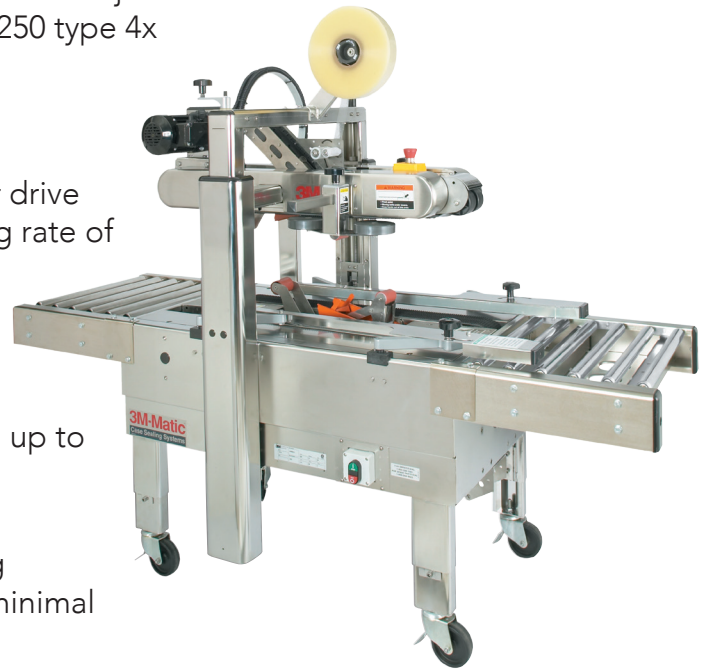

BOX CAPACITY INCHES (MM)

Machine	Length	Width	Height
700a-s	Min: 6 (150mm) Max: 21.5" (546mm)	Min: 6 (150mm*) Max: Unlimited	Min: 4.75" (121mm) Max: 24.5" (622mm)

*3.75" [90mm] with taping heads adjusted to apply 2" [51mm] tape leg lengths and upper mast stops relocated.


Special modifications may be available for carton sizes not listed above. Contact your 3M Certified Specialist for information.

Note: The 3M-Matic™ 700a-s can accommodate most boxes within the size range listed above. However, if Box length in Direction of Seal is less than .5 Box Height boxes should be test run to ensure proper machine performance.

SPECIFICATIONS



3M-Matic™ Case Sealer 700a-s

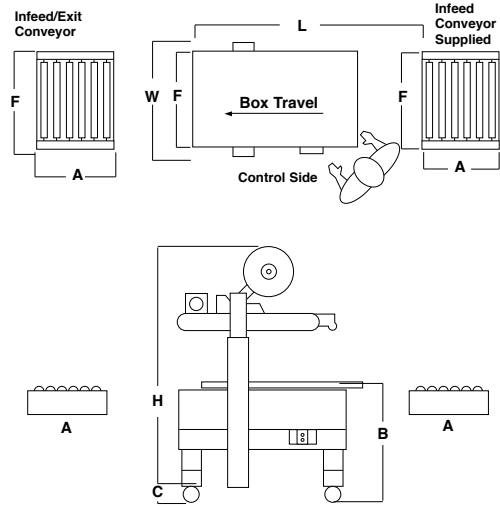

700a-s Footprint

MACHINE DIMENSIONS INCHES (MM)

Machine	Tape Size In. (mm)	Machine Weight Lbs. (kg)	W	L	H	A*	B	C**	F	Electrical	Operating Rate	Drive Belt Speed
700a-s	1.5-2 (36-48)	460 (208)	31 (787)	40.5 (1030)	Min: 53 (1346) Max: 86 (2184) Masts Up: 90 (2290)	18 (457)	Min: 24 (610) Max: 35 (889) Masts Up: Min: 20 (510) Max: 31 (780)	4 (102)	24.5 (622)	115V 60Hz 3.8A 440 watts 8' cord	Up to 30 per minute	75 fpm (.38 m/s)

*Exit conveyor is optional. **Casters are optional.

Operating conditions: Use in dry, relatively clean environments at 40°F to 120°F with clean boxes. Machine should not be washed down.

Contact your 3M Certified Specialist for special modifications that may be available for sizes not listed.

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

