

3M-Matic™ Side Belt Case Sealer 8000a/8000a3 Consistent. Reliable. Tough.

SEALS UP TO 40 CASES PER MINUTE

Today, companies need to be fast and flexible in every phase of their operations—and that includes end-of-line packaging. The 3M-Matic™ Side Belt Case Sealer 8000a/8000a3 gives manufacturers and distributors from every industry the packaging flexibility and speed to stay one step ahead of the competition.

Narrow width cases have met their match in this state-of-the-art case sealer from 3M. Engineered for maximum throughput and stability for almost any case height and width, the 3M-Matic™ Side Belt Case Sealer 8000a/8000a3 is the high volume solution for box sealing productivity.

Innovative Features

- 3M™ AccuGlide™ 3 Taping Heads ensure reliable application of tape without box damage
- Interchangeable 2- or 3-inch taping heads maximize production flexibility
- Easily accessible side handle and reference ruler make height adjustments a snap for a wide variety of case heights from 3.75–36.75 inches
- Rugged, dual-extruded columns allow for smooth incremental adjustments to case heights

Standard Features

- Spring-loaded side belt drive
- Top flap compression rollers
- Centrally located emergency stop
- Spring-loaded upper drive assembly
- Dual masts and dual lead screws

Options: Infeed and exit conveyors, locking casters, low tape indicator, tape application monitor, box hold-down attachment, 3-flap folder



BOX CAPACITY INCHES (MM)

Machine	Length	Width	Height*
8000a	Min: 6 (150) Max: Unlimited	Min: 4.5 (114) Max: 21.5 (546)	Min: 4.25 (108) Max: 28.25 (711)
8000a3	Min: 6 (150) Max: Unlimited	Min: 5.5 (140) Max: 21.5 (546)	Min: 4.25 (108) Max: 28.25 (711)


*Minimum case height of 3.75" can be obtained by moving columns and upper assembly to lowest position and using the short 2-inch tape leg.

** Maximum case height of 36.75" can be obtained by moving columns and upper assembly to highest position. Minimum will be 13.375".

SPECIFICATIONS

2" Scotch® Box
Sealing Tapes

3" Scotch® Box
Sealing Tapes

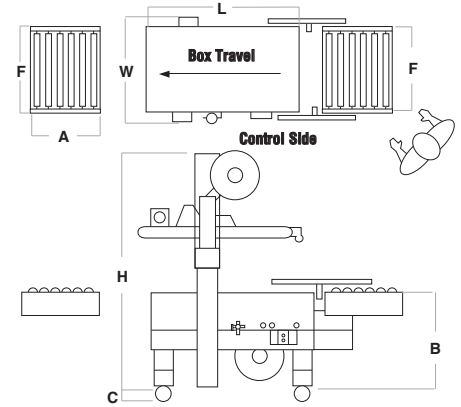

3M-Matic™ Side Belt Case Sealer 8000a

3M-Matic™ Side Belt Case Sealer 8000a3

8000a & 8000a3 Footprint

MACHINE DIMENSIONS INCHES (MM)

Machine	Tape Size In. (mm)	Machine Weight* Lbs. (kg)	Width	Length (without conveyors)	Height (with masts raised)	A**	B	C***	F	Electrical	Operating Rate	Drive Belt Speed
8000a	1.5-2 (36-48)	350 (159)	39 (991)	36.25 (921)	101(2642)	18 (457)	Min: 21 (508) Max: 35 (864)	4.38 (111)	30.25 (768)	115V 60Hz 3.8A 440 watts 8' cord	Up to 40 per minute	100 fpm (.05 m/s)
8000a3	2-3 (48-72)											

*Uncrated ** Optional Conveyor *** Optional Casters

Contact your 3M Certified Specialist for special modifications that may be available for sizes not listed.

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

3M Premier Service
Industrial Products Distributor