


3M-Matic™ Automatic Adjustable Case Sealer 800af/800af3 Consistent. Reliable. Tough.

UP TO 40 CASES PER MINUTE

3M-Matic™ Automatic Adjustable Case Sealer 800af/800af3 with 3M™ AccuGlide™ 3 Taping Head is an automatic flap folding machine that seals both the top and bottom of a box without an operator. The 3M-Matic™ Automatic Adjustable Case Sealer 800af/800af3 folds the top flaps prior to sealing with either 48mm or 72mm side tape.

- Energy Savings Option automatically shuts sealer off if no box is present
- Integrated box gate (indexer) with adjustable pressure and height to separate boxes from flooded infeed conveyor
- One centrally-located emergency stop on each side for quick and easy access
- Safety-interlocked hinged access doors with steel screen for viewing case flow
- Consistent durable tape that is manually adjusted for a wide range of box sizes
- Rugged construction 16-gauge with melded frame
- Upper flap folding eliminates need for an operator


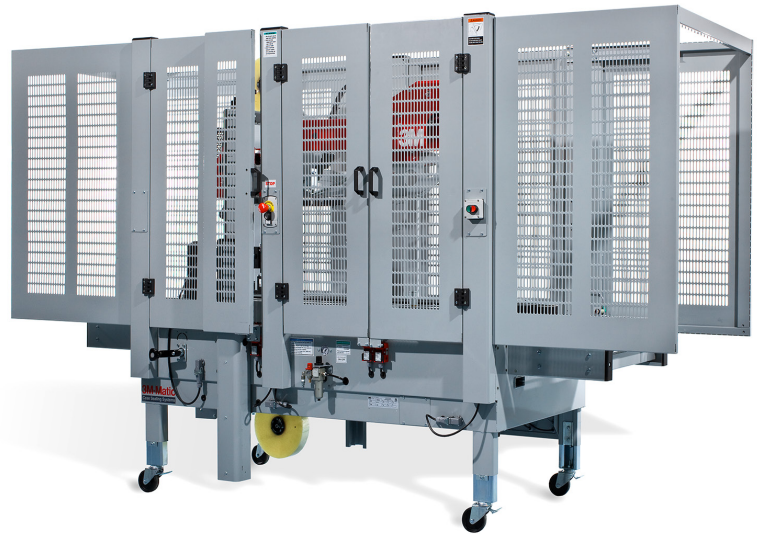


BOX CAPACITY INCHES (MM)

Machine	Length	Width	Height	Weight Range Lbs. (kg)
800af	Min: 6 (150) Max: 30 (762)	Min: 4.75 (120) Max: 21.5 (546)	Min: 4.5 (114) Max: 24.5 (625)	Min: 5 (2.3) Max: 85 (38)
800af3	Min: 6 (150) Max: 30 (762)	Min: 5.75 (146) Max: 21.5 (546)	Min: 4.5 (114) Max: 24.5 (625)	Min: 5 (2.3) Max: 85 (38)

Contact your 3M Certified Specialist for special modifications that may be available for sizes not listed

SPECIFICATIONS

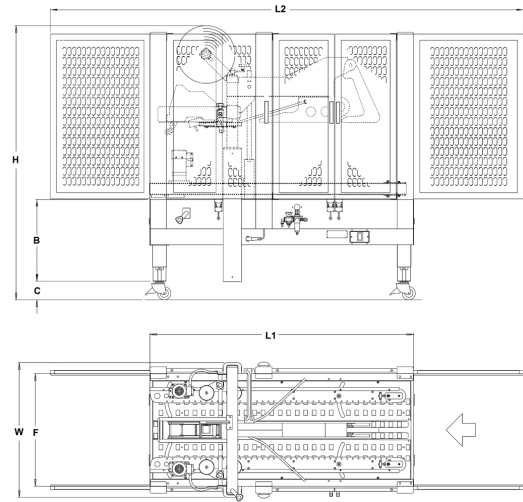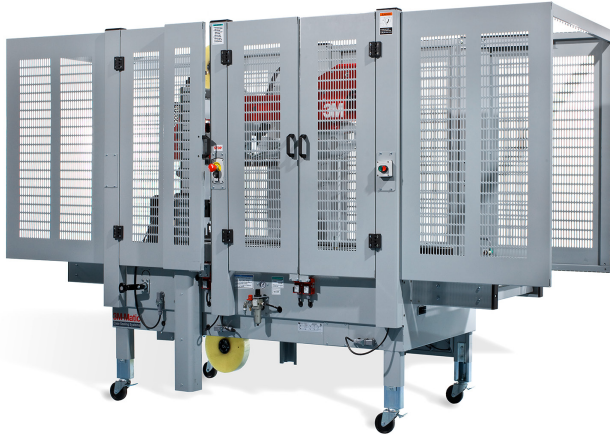

3M-Matic™ Automatic Adjustable Case Sealer 800af/800af3

800af/800af3

MACHINE DIMENSIONS INCHES (MM)

Machine	Tape Size In. (mm)	Machine Weight* Lbs. (kg)	W	L1	L2	H	B	C**	F	Electrical	Air	Operating Rate	Drive Belt Speed
800af	1.5-2 (36-48)	820 (370)	38.75 (984)	75.6 (1920)	135.6 (3444)	Min: 62 (1575) Max: 86 (2184)	Min: 24 (610) Max: 35 (889)	5.25 (133)	32.5 (826)	115V 60Hz 3.8A 440 watts 8' cord	2.5 SCFM @ 85 PSIG	Up to 40 per minute	100 fpm (.05 m/s)
800af3	2-3 (48-78)												

*Uncrated ** Optional casters

Use with clean, dry boxes in dry, relatively clean environments at 40–120°F (4.4–48.9°C)

Contact your 3M Certified Specialists for special modifications that may be available for sizes not listed.

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

3M Premier Service
Industrial Products Distributor