

“Clip” production costs for non-standard packages

VERSATILITY AND DEPENDABLE, SECURE CLOSURE

- Scotch® High Performance Filament and Reinforced Strapping Tapes secure packages with maximum holding power and durability.
- For five panel folds, full overlap, telescoping, tuck fold and other non-standard packages, the 3M-Matic™ L-Clip Applicators S-867 and S-867 II provide cost-effective, time-saving solutions by applying pre-fed 4.5” clips of tape securely with less effort. Apply clips at up to 50 per minute.

PERFORMANCE FEATURES

- Quickly, accurately and reliably close a variety of non-standard packages including those as narrow as 1.5” when using the optional narrow box attachment
- Consistent tape leg length of 4.5” helps prevent waste
- Apply clips of Scotch® Filament and Reinforced Strapping Tapes up to 36mm wide
- Durable rollers buff tape down for consistently secure closures
- Air pressure and flow controls positioned to reduce unnecessary adjustments, improve ease of maintenance, access, and increase floor layout options
- Oil-less operation helps reduce maintenance
- Convenient access cover for easy tape threading
- Service interlock valve designed for safety
- Package contact plate activates tape application easily and safely
- Compact and easy to install
- Heavy duty one-piece frame for durability and stability
- Non-electric for economical compressed air operation

With optional U-Clip adapter, the unit applies U-clips on flat materials from 1/4” to 1” thick with the same speed and accuracy as L-Clips.

Starting with the same features as the S-867, the S-867 II dual head configuration simultaneously applies two L-Clips side by side as close as 8” apart. Packages are easily moved and positioned across the stainless steel roller ball work surface.



Secure L-Clip closure for non-standard packages

BOX CAPACITY INCHES (MM)

Machine	Length (Top & Bottom)	Width (Top & Bottom)	Height (Top & Bottom)
S-867	Min: 2.25 (60mm) Max: Unlimited	Min: 5 (130mm)* Max: Unlimited	Min: 2.25 (60mm) Max: Unlimited
S-867II	Min: 2.25 (60mm) Max: Unlimited	Min: 5 (130mm)* Max: Unlimited	Min: 2.25 (60mm) Max: Unlimited

Note: Operator will determine maximum height, width, length, and weight. Please contact your 3M Certified Specialist for assistance in determining proper equipment layout and set-up, or call 952.929.2664.

SPECIFICATIONS




S-867 Single Head Applicator




S-867 II Dual Head Applicator

Footprint:

Right Side View

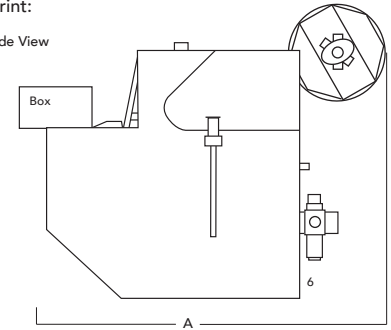

Front View

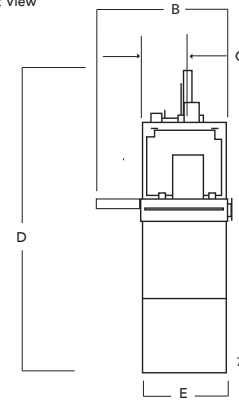

TAPE:

Scotch® Filament Tape.

Width: 3/8 inch (9mm) minimum to 1 1/2 inch (36mm) maximum

Roll Diameter: up to 15 inches (380mm) maximum on a 3 inch (76.2mm) diameter core.

Applied Tape Length: 4.5 inches (115mm) (normal). Tape legs are 2.25 inches ± .125 inches (55mm ± 3.2mm)

MACHINE DIMENSIONS INCHES (MM)

Machine	Weight Lbs. (kg)	Width	Length	Height	A*	B	C	D	E	Electrical	Operating Rate
S-867	Unpackaged: 75 lbs.(34)	11 (280)	31 (790)	29 (735)	32.0 (812)	11.0 (260)	4.25 (108)	29.0 (735)	6.5 (165)	60 to 65 PSIG (515 kPa - 560 kPa) 2.16 SCFM (3.65 m3/h 21°C, 101 kPa) at a maximum cycle rate. A pressure regulator-filter-lubricator is included.	1.2 seconds
S-867 II	Packaged: 83 lbs. (37.7)		(includes 360 yard (330m) tape roll)	(includes 360 yard (330m) tape roll)							

Please contact your 3M Certified Specialist for assistance in determining proper equipment layout and set-up, or call 952.929.2664.

Note: Machine should not be washed down or subjected to conditions causing moisture condensation on components.

Scotch® Reinforced Strapping Tapes for your best image

With this unique transparent mono-filament tape, package graphics show through to best advantage.

- Bar code scannable in most applications
- High tensile strength and resists nicks and abrasion
- Combination of unique features and pricing add up to better value



3M Premier Service
Industrial Products Distributor