

3M-Matic™ Adjustable Case Sealer a20-S Affordable Productivity in Moist Environments


UP TO 30 CASES PER MINUTE

When your packaging volume exceeds the limits of manual taping, the 3M-Matic™ Adjustable Stainless Steel Case Sealer a20-s is an affordable increase in productivity for top and bottom sealing of RSCs in high moisture and corrosive environments. With quick, easy adjustments you can seal a wide range of case heights and sizes. Features include:

- Engineered with 99% stainless steel for corrosion resistance and use in high moisture environments
- Reliable motor drive for box after box dependability
- Designed for use with the full range of 36-48mm (1.5-2") Scotch® Box Sealing Tapes
- Emergency stop centrally located for quick and easy access
- Side guides adjustable to keep cases centered under the taping head
- Dual masts for taping head stability
- Laced belts with traction grip for reliable feeding, easy replacement

Options: Stainless steel casters and conveyors.

3M™ AccuGlide™ Stainless Steel Taping Head 2+ for consistent tape application

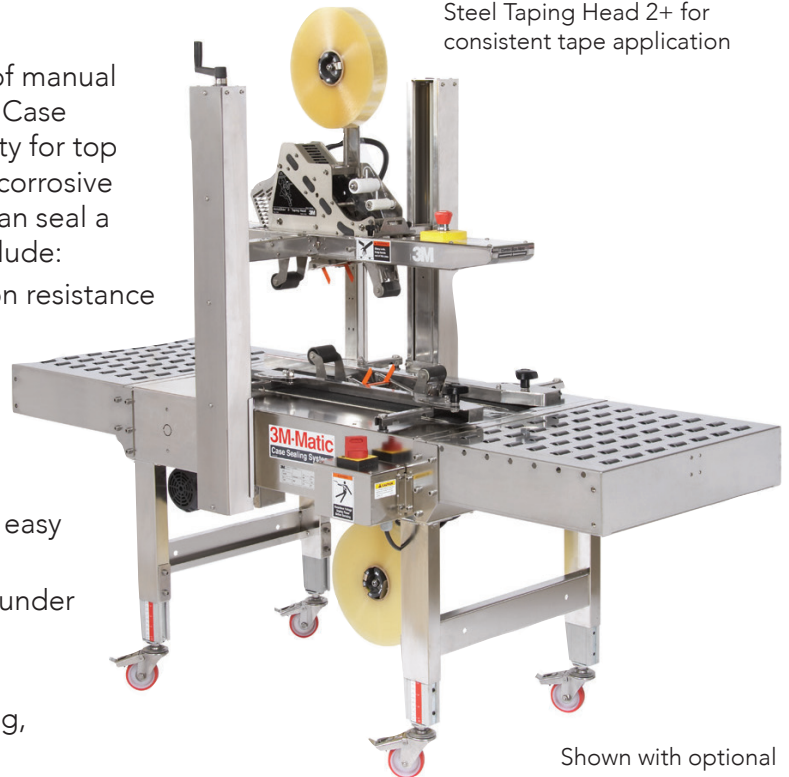

Shown with optional accessories

BOX CAPACITY INCHES (MM)

Machine	Length	Width	Height	Weight Range Lbs. (kg)
a20-S	Min: 6 (150) Max: Unlimited	Min: 6 (150) Max: 21.5 (550)	Min: 4.75 (120) Max: 21.5 (550)	Min: 5 (2.3) Max: 65 (29.5)



Contact your 3M Certified Specialist for special modifications that may be available for sizes not listed

* 3.75" (90mm) with taping heads adjusted to apply 2" (50mm) tape leg lengths and mast stops relocated.

Note: The 3M-Matic™ Adjustable Case Sealer a20-S can accommodate most boxes within the size range listed here.

However, if the Box Length in Direction of Seal divided by Box Height is less than .75 in boxes should be test run to ensure proper machine performance.

SPECIFICATIONS

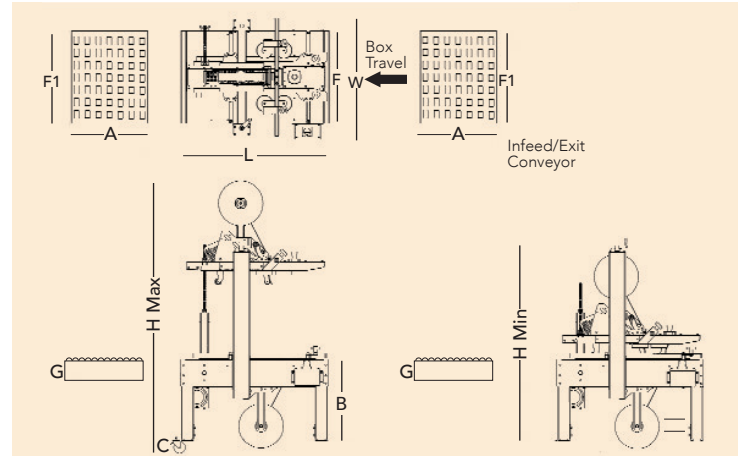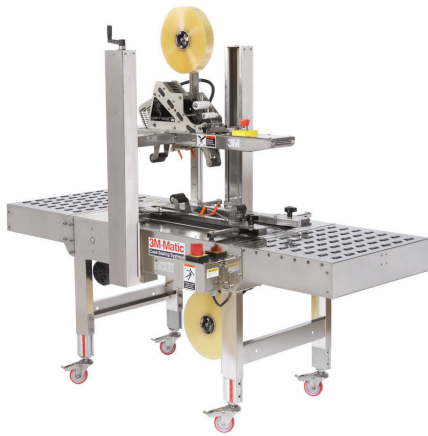

3M-Matic™ Stainless Steel Case Sealer a20-s

a20-S Footprint

MACHINE DIMENSIONS INCHES (MM)

Machine	Tape Size In. (mm)	Machine Weight* Lbs. (kg)	W	L	H	A**	B	C***	F	Electrical	Operating Rate	Drive Belt Speed
a20-S	1.5-2 (36-48)	252 (115) Crated: 300 (137)	32 (805)	39.5 (1000)	Min: 53.5 (1355) Max: 68.5 (1740)	18.1 (460)	Min: 21.5 (545) Max: 31.5 (800)	4.2 (106)	24.5 (620)	115V 60Hz 3.8A 440 watts 8' cord	Up to 30 per minute depending on box length	75 fpm (.38 m/s)

Use with clean dry boxes in dry, relatively clean environments at 40°F to 120°F (4.4°C to 48.9°C).

*Uncrated ** Optional infeed/exit conveyors ***Optional casters

Contact your 3M Certified Specialists for special modifications that may be available for sizes not listed.

* 3.75" (90mm) with taping heads adjusted to apply 2" (50mm) tape leg lengths and mast stops relocated.

Note: This technical information and data should be considered representative or typical only and should not be used for specification purposes.

