


## An energy-saving shrink tunnel with intelligent technology

The compact shrink tunnel for small to medium formats. With the extra advantage of heat performance. The Compact 650 S is ready to go in an instant. It takes just three minutes to heat up. The unique ring-nozzle heating system is easy to install and its intelligent technology is energy efficient.



### SPECIFICATIONS

Adjustable working height:	32" - 35"
Tunnel clearance width, height:	25"/4" or 8"
Length of the heated tunnel hood:	48"
Power supply:	208 - 480 Volt
Continuously adjustable temperature:	up to 190°C/375°F
Transport Speed:	15' - 90' Minute
Installed heating capacity:	13.5 kW

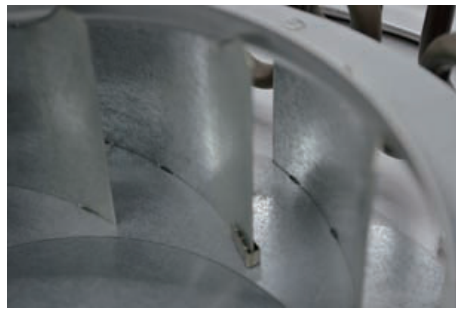

The ring nozzle heating system provide uniform heat transfer to the packaged product.

### YOUR BENEFITS HIGHLIGHTED

- Perfect packaging results using constantly uniform heat energy transfer to the packaged goods, regardless of the position on the conveyor belt
- Ring nozzle heating technology with integrated air circulating system for efficient energy recovery
- High level of insulation and compact design ensure fast warm-up times
- Easy adjustment of basic parameters (temperature, air volume and package speed) using continuously adjustable controller
- Intelligent technology ensures constant temperature during operation. Energy-intensive temperature fluctuations are prevented
- Carefully selected components, easy to maintain, maintenance-free plastic mesh-belt