

Consistent Quality, Performance, and Reliability in a Flexible L-Seal Design Models: A-26A, A-27A & A-28A

The Shanklin A-Series of compact, rugged, and versatile Automatic L-Sealers offers gentle product feed and straight line product flow that make them ideally suited for handling a wide variety of products. A-Series machines feature conveyor-fed automatic operation and are capable of processing up to 35 packages per minute, plus the L-Seal design provides great flexibility and quick product change. Each will accept randomly spaced product, fed either automatically or by hand.

Reliable — Equipped with programmable controllers for simplicity of wiring and ease of troubleshooting; facilitates easy machine set-up and adjustment

Flexible — Photoelectric sensor system automatically compensates for package length change; automatic film advance system allows light, flexible products to be fed through the machine with ease

Versatile — Offers easy product and size changeover and the ability to handle virtually any type of film (depending on sealing system); most features are fully adjustable for maximum convenience


Safe — Electrical controls are UL-listed (for meeting the highest safety standards); sealing area is protected by an electrically interlocked transparent hood through which the sealing process may be safely observed; hood may be easily lifted for full access when necessary

Secure — Password protection capability safeguards sensitive machine functions


Easy to use and maintain—EZ load unwind feature offers easy loading and threading capability; machine controls are located in front for quick and easy access

Features

- User friendly control panel
- Color coded touch screen
- Automatic film puller
- EZ Load film unwind

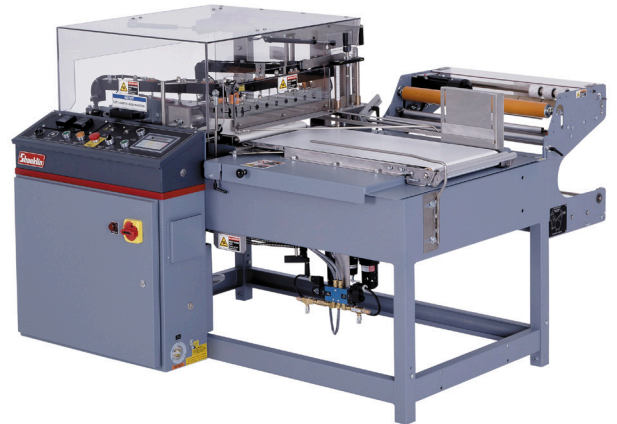

A-26A

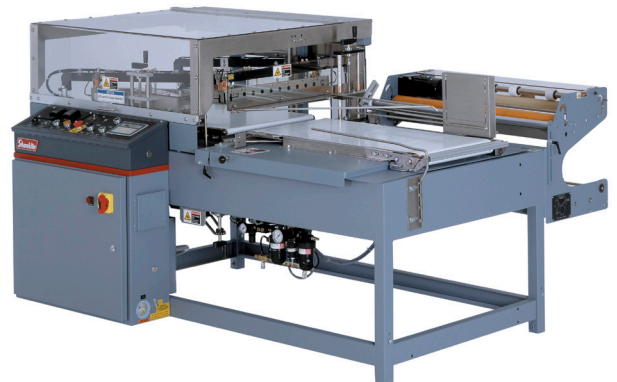

A-27A



A-28A

SPECIFICATIONS

	Model A-26A	Model A-27A	Model A-28A
Seal Size	15"W x 21"L	21"W x 33"L	31"W x 43"L
Max. Product Height	5 1/2"	8"	10"
Min. Product Length	4" Standard 4" standard 7 1/2" standard 1 1/2" with optional closing conveyor	4" standard 2 3/4" with optional closing conveyor	7 1/2" standard 5" with optional closing conveyor
Max. Product Length	20"	31"	41"
Max. Film Width (Folded)	24"	30"	36"
Max. Film Width (Flat)	44" with compact centerfolder		
Conveyor Height	Adjustable 31 1/2" – 37 1/2"		
Packaging Speeds*	Up to 35 packages per minute (standard)		25 packages per minute maximum
Longitudinal and Transverse Seal	Hot knife jaws or SmartWire		Hot knife jaws
Power	230V, 15 Amps, 60 Hz, 1 phase		
Compressed Air	0.5 C.F.M. free air at 60 psi		
Safety Devices	<ul style="list-style-type: none"> • Emergency stop button instantly stops all machine functions until manually reset • Multiple safety interlocks • A transparent hood, interlocked electrically with the automatic sequencing circuit, covers • Tamper-resistant controls the sealing area; gas cylinders support the hood when it is lifted to allow access • Low voltage sensors and actuators • Film clamp proximity sensors ensure safe sealing arm jaw closure 		

*Dependent on product and application.

Specifications on all machines subject to change without notice.

OPTIONS

Options	A-26A	A-27A	A-28A
Adjustable Flight Bar Infeed Conveyor	X	X	
Adjustable Flight Lug Infeed Conveyor	X	X	
Product Separating Infeed Conveyor	X	X	X
Closing Discharge Conveyor	X	X	X
Product Pressure Rollers over the Discharge Conveyor	X	X	X
EZ Load Compact Centerfolder	X	X	X
Dual Roll Compact Centerfolder	X	X	X
Dual Infeed Eyes	X	X	X
Print Registration	X	X	X
Discharge Rollers for Light Product	X	X	X
Casters	X	X	X
SmartWire Seal Jaws (in lieu of Hot Knife Jaws)	X	X	
EZ Film Thread Infeed Table	X	Standard	

